

Datasheet

Subject to technical alteration
Issue date: 3/14/2025 • A140



Illustration similar

» APPLICATION

The ceiling motion detector detects the movement of persons indoors and can switch light as required or also provide a temperature reduction in unused rooms. The installation is inconspicuous in false ceilings because of the small design. There are 3 types available with different detection ranges.

» TYPES AVAILABLE

Ceiling sensor motion – active relay

- RDI Standard
- RDI Small Range
- RDI Spot

» SECURITY ADVICE – CAUTION

The installation and assembly of electrical equipment should only be performed by authorized personnel.



The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

» PRODUCT TESTING AND CERTIFICATION



Declaration of conformity

The declaration of conformity of the products are available on our website
<https://www.thermokon.de/direct/en-gb/categories/rdi>

» NOTES ON DISPOSAL




The crossed-out wheeled bin symbol indicates that the product or removable batteries must not be disposed of with household or commercial waste. Within the EU, you are legally obliged to dispose of the product separately and appropriately in accordance with the national laws of your country. Alternatively, please contact your supplier or Thermokon Sensortechnik GmbH. Further information can be found at: www.thermokon.com

» TECHNICAL DATA

General

Measuring values	Motion
Output switching contact	floating contact NO for 24 V =/~, load max. 1 A (resistive), with follow-up time 8 seconds
Power supply	15..24 V = ($\pm 10\%$) or 24 V ~ ($\pm 10\%$) SELV
Power consumption	typ. 0,5 W (24 V =) 1,1 VA (24 V ~)
Sensor	PIR (passiv infrarot)
Enclosure	ABS, pure white
Protection	IP20 according to DIN EN 60529
Cable entry	rear entry, breaking points bottom, drill mark top
Connection electrical	terminal block, max. AWG16, connection wire PVC (2xAWG24) length=3,94in.
Ambient condition	-4..+122 °F, max. 85% non-condensing

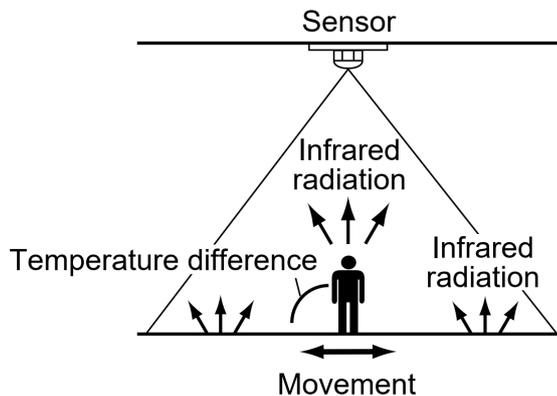

Remark: After having switched-on the operating voltage, the switch output is switched-on for approx. 30sec. in the stabilisation status of the sensor.

The mentioned ranges relate to average conditions upon a certain mounting height. Thus, they should only be considered as approximate values. The range can considerably deviate upon changing temperature conditions. The necessary temperature difference between object for detection and the background should be at least 5K. The speed of the object should at least amount to 1 to 3.3 ft/s. The occupancy sensor should not be mounted near interfering heat sources (e.g. lamps, radiators, fans etc.), to prevent false triggering. The target concept should be a human body with an approx. size of 28×10 in..

This sensor detects changes in infrared radiation which occur when there is movement by a person (or object) which is different in temperature from the surroundings..

RDI Standard


Detection range	
Detection distance	max. 33 ft. (10 m)
Field of view horizontal x	110°
Field of View vertical y	93°
Detection zone	80

A installation height of 16.4 ft. (5 m) results in a detection area of approx. 52.1x40.3 ft. divided into 80 measuring zones.

Formula:

$\tan(55) * \text{installation height} = \text{radius detection range } x$

$\tan(46.5) * \text{installation height} = \text{radius detection range } y$

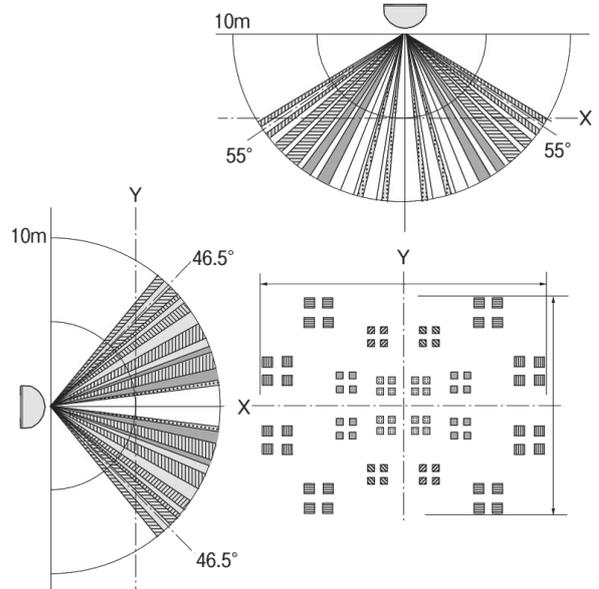

RDI Small Range


Detection range	
Detection distance	max. 16,4 ft. (5 m)
Field of view horizontal x	100°
Field of View vertical y	82°
Detection zone	64

A installation height of 8.2 ft. (2,5 m) results in a detection area of approx. 24.3x18.7 ft. divided into 64 measuring zones.

Formula:

$\tan(50) * \text{installation height} = \text{radius detection range } x$

$\tan(41) * \text{installation height} = \text{radius detection range } y$

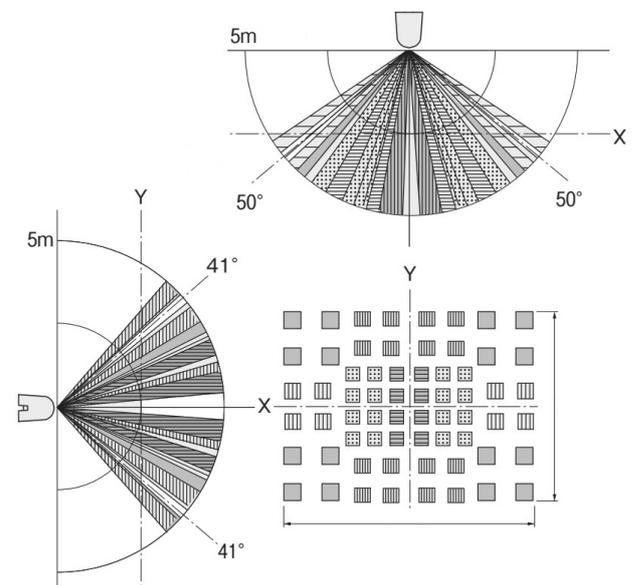

RDI Spot


Detection range	
Detection distance	max. 16.4 ft. (5 m)
Field of view horizontal x	22°
Field of View vertical y	38°
Detection zone	24

A installation height of 6.6 ft. (2 m) results in a detection area of approx. 6.6x4.6 ft. divided into 24 measuring zones.


Formula:

$\tan(19) * \text{installation height} = \text{radius detection range } y$

$\tan(11) * \text{installation height} = \text{radius detection range } x$

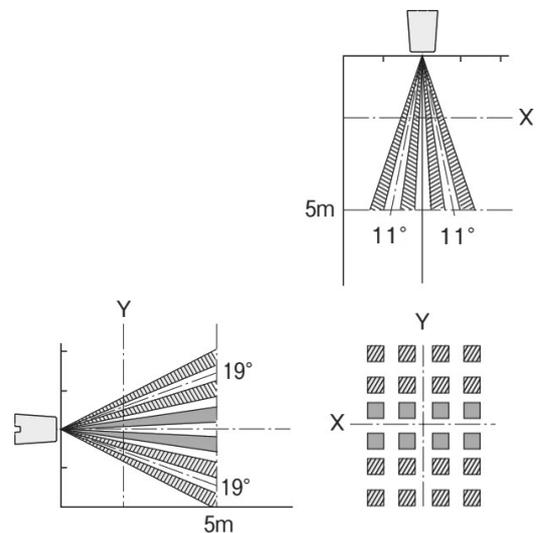


» CONNECTION PLAN

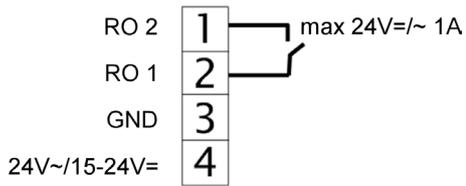


» MOUNTING ADVICES

Please make sure that the device is de-energized if you want to install it!

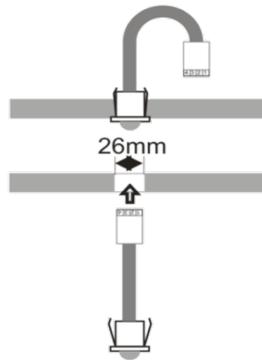

» DIMENSIONS (IN.)

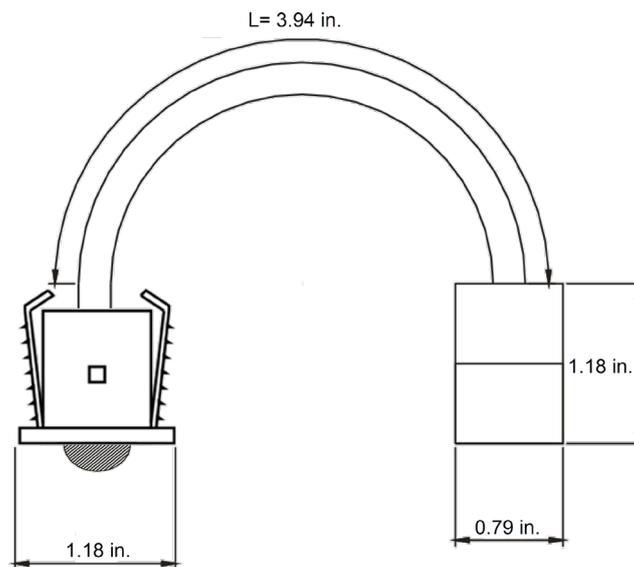

» ACCESSORIES (OPTIONAL)

Rawplugs and screws (2 pcs. each)

Item No.: 102209