


LS02+ flex

Leakage Sensor

thermokon[®]
HOME OF SENSOR TECHNOLOGY

Datasheet

Subject to technical alteration
Issue date: 28.11.2024 • A141

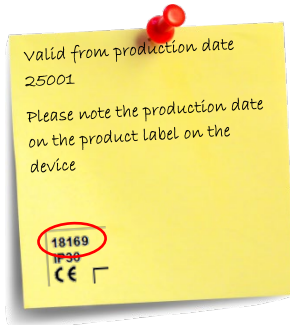

» APPLICATION

Leakage sensor for detecting (weakly) electrically conductive liquids (e.g. water leaks under air conditioning units, burst pipes) along the entire sensor line. With a length of up to 30 m, larger areas can also be covered. The cable is laid in a spiral around the respective pipe or in a meandering pattern on surfaces or in collection containers. Due to the insulation between the twisted sensor cables, the sensor element can also be used on electrically conductive materials.

» TYPES AVAILABLE

Leakage sensor

- LS02+ flex 2 m
- LS02+ flex 5 m

Other lengths on request, up to 30 m possible

» SECURITY ADVICE – CAUTION



The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

» PRODUCT TESTING AND CERTIFICATION



Declaration of conformity

The declaration of conformity of the products are available on our website
<https://www.thermokon.de/direct/en-gb/categories/ls02plus-flex>

» NOTES ON DISPOSAL




The crossed-out wheeled bin symbol indicates that the product or removable batteries must not be disposed of with household or commercial waste. Within the EU, you are legally obliged to dispose of the product separately and appropriately in accordance with the national laws of your country. Alternatively, please contact your supplier or Thermokon Sensortechnik GmbH. Further information can be found at: www.thermokon.com

» TECHNICAL DATA

Measuring values	leakage
Output switch contact	changeover contact, 24 V: max. 24 V / 1,0 A (resistive, floating)
Power supply	15..24 V = ($\pm 10\%$) or 24 V ~ ($\pm 10\%$) SELV
Power consumption	typ. 0,8 W (24 V =) 1,6 VA (24 V ~)
Display	LED green – power supply OK, LED red – Leakage
Enclosure	enclosure USE-M, PC, pure white, cover PC, transparent, with removable cable entry
Protection	IP65 according to EN 60529
Cable entry	Flextherm M20, for wire $\varnothing=4,5..9$ mm, removable
Connection electrical	removable plug-in terminal, max. 2,5 mm ²
Sensor rod	PVC, L=2 5 m, other lengths on request (max. 30 m)
Switching threshold conductivity	ca. 1 μ S
Ambient condition	-20..+60 °C, max. 85% rH short term condensation

» CONNECTION PLAN

The power supply must not be interrupted. If the leakage protection is not permanently supplied with power, a possible leakage cannot be detected.

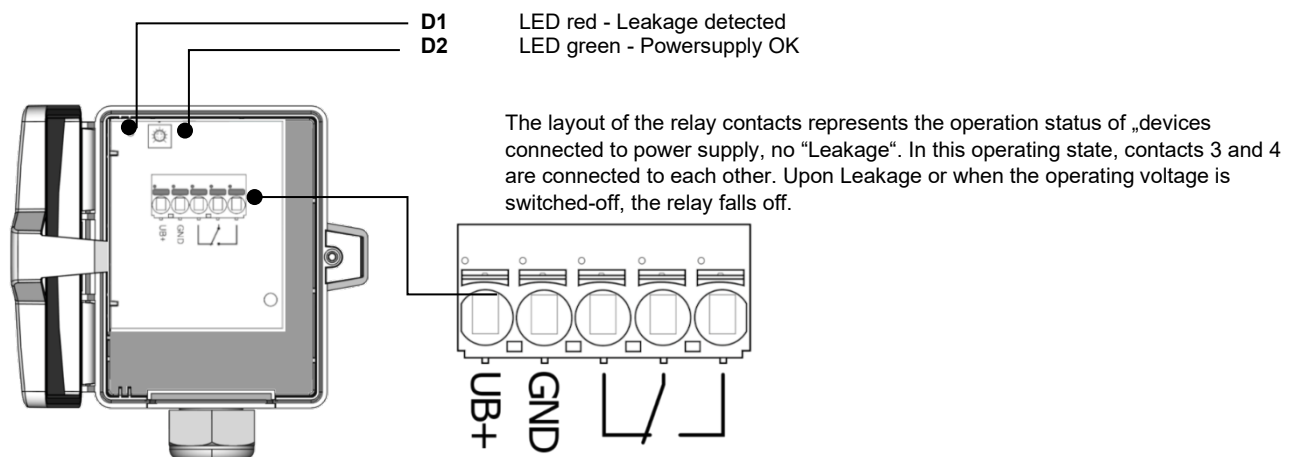


» MOUNTING AND INSTALLATION

The sensor cables can be fixed to a surface with the self-adhesive holders (see accessories). Make sure that the surface to be glued is dry and free of dirt.

» MAINTENANCE/INSPECTION

- ▶ Carry out a functional check at least once a year. In this case, immerse the end of the sensor rod in a container of water and check the switching process of the relay.
- ▶ If heavily soiled, disassemble and clean the sensor housing and sensor rod.
- ▶ After a leakage, the sensor must also be tested again for function.

» DIMENSIONS (MM)

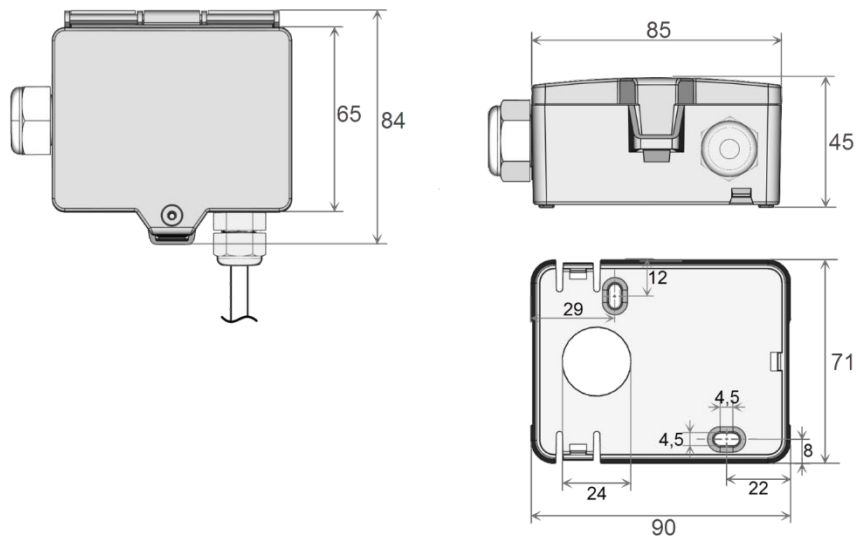

» ACCESSORIES (INCLUDED IN DELIVERY)

Holder for sensor cable, self-adhesive

Mounting base enclosure USE pure white

Mounting kit universal

• Cover screw + screw cover • 2 Rawlplugs • 2 Screws (countersunk head) • 2 Screws (rounded head)

Item No. 668354

Item No. 698511

» ACCESSORIES (OPTIONAL)

Sealing insert M20 USE white, 2x Ø=7 mm (for 2 wire; PU 10 pieces)

Item No. 641333